

A-20SS AIRLESS FOAMER

MODEL # 917905

OVERVIEW

The A-20SS Airless Foamer is a 11.7 L/min @ 48.3 bar foam applicator for projecting foaming chemicals on to any surface up close or at a distance without compressed air. This stainless steel venturi injection system uses high water pressure (27.6 - 68.9 bar) to draw and blend chemical concentrate into the water stream to create an accurately diluted solution. The solution then flows through the discharge hose and trigger gun to the "airless" foam wand which draws in atmospheric air to create and project wet, clinging foam at distances up to 3.7 m.

KEY FEATURES

- No compressed air required
- Designed for foam cleaning medium to large sized areas
- Projects wet, clinging foam which increases chemical contact time and effectiveness
- Foaming expands the chemical and reduces overapplication by providing visual assurance of coverage
- Fan nozzle for fast coverage at distances up to 3 m and zero degree nozzle for up to 3.7 m foam throw (depending on water pressure)
- Stainless steel components ensure years of outstanding performance with minimal maintenance
- Available for 2 chemicals (# 917907)
- See other configurations of Lafferty high water pressure foamers in [Catalogue 3](#)

INCLUDES

- Stainless steel mounting bracket
- Machined stainless steel injector body
- Machined stainless steel airless foam wand
- 20 color-coded precision metering tips to set dilution ratios
- 15.2 m discharge hose & trigger gun
- Fan nozzle & zero degree nozzle

OTHER ACCESSORY OPTIONS (SEE SIDE PANEL)

Stainless Steel Hose Racks

- Large Stainless Steel Hose Rack # 224150

Stainless Steel Jug Racks


- Jug Rack, SS, 1 Gallon/3.8 L, Round/Square # 224200
- Jug Rack, SS, 2 1/2 Gallon/9.5 L # 224210
- Jug Rack, SS, 5 Gallon/ 18.9L, Round/Square # 224215

Safe Flow Lid™ for 1 Gallon Jugs

- Lid, Suction Tube, and Strainer # 709101

Alternate Check Valve - EPDM Standard

- Check Valve, Chemical, SS, Viton, 1/4" # 491324-V

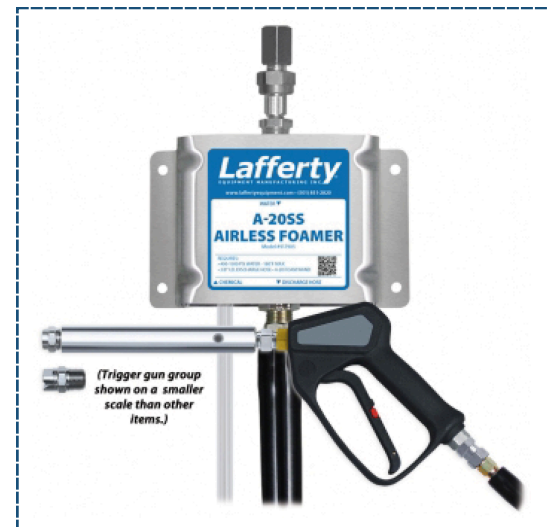

REQUIREMENTS

- Chemical Concentrate
- Water
 - Temperature: Up to 82.2°C
 - Pressure: 27.6 - 68.9 bar
 - Flow: 11.7 L/min @ 48.3 bar
 - Supply Line: 3/8"
- Hose: 3/8" ID x 15.2 m
- Nozzle: A-20 Airless Foam Wand
- Dilution Ratio Range: 711:1 to 7:1 @ 48.3 bar

APPLICATIONS

- Food & Beverage
- Agriculture/Horticulture
- Animal Health
- Vehicle Wash
- Dairy
- Hatchery
- Industrial
- Janitorial/Sanitation
- Pharma/Bio
- And Many Other Applications!