



THE  
SPRAY NOZZLE  
PEOPLE

# TurboMix®

Eductor Mixing  
Nozzle

## MIXING

### DESIGN FEATURES


- ✓ Effective, economical way to circulate liquids in closed or open tanks
- ✓ No moving parts
- ✓ Inherently clog resistant
- ✓ Require minimal maintenance
- ✓ Nozzle operation creates multiplying effect on fluid flow
- ✓ The volume of discharge liquid will be 3-5 times greater than the motive liquid pumped
- ✓ Available in metal (brass, carbon steel or 316ss) or plastic (glass reinforced polypropylene or Kynar®/PVDF)

### SPRAY CHARACTERISTICS

- ✓ Cone-shaped plume
- ✓ Flow rates: 26.7 to 1200 l/min (motive)



Uni-Spray  
Systems Inc.



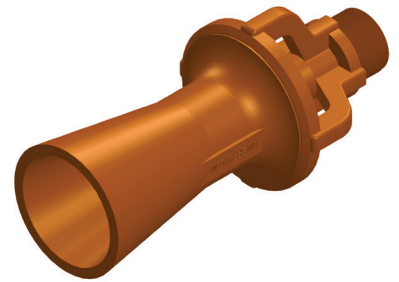


Eductors are a simple and cost-effective way to improve mixing and recirculation systems. Submerged in a tank, liquid is pumped through the eductor. The design is such that the motion of the pumped liquid entrains the surrounding liquid via the Venturi effect. This means that approximately 5 times the volume of the pumped liquid is moved. In effect, the efficiency of the pump is increased 5 fold.


CALL NOW : +44 (0) 1273 400092

[www.spray-nozzle.co.uk](http://www.spray-nozzle.co.uk)

The Go-to People for spray nozzle solutions

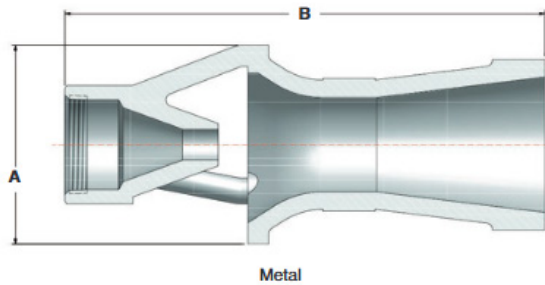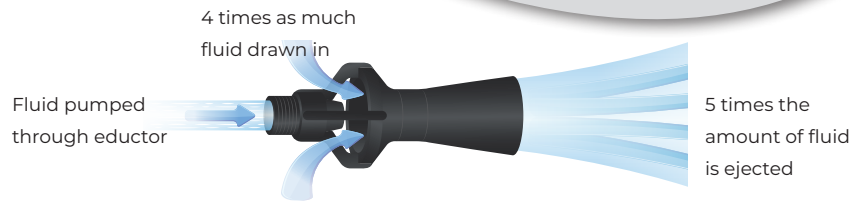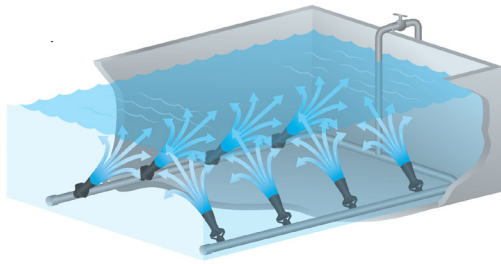

Metal

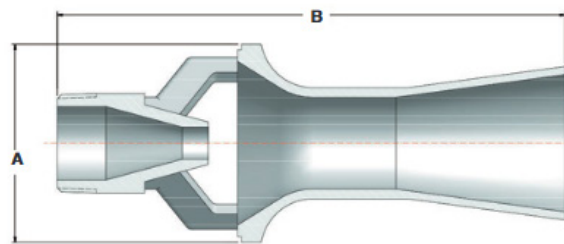

Plastic

## Metal Eductor Flow Rates and dimensions

**Materials:** Brass (up to 3"), carbon steel, 316 stainless steel.

Female Thread	K factor	Motive (pumped) flow in litres per minute @ BAR						Dimensions (mm)		Weight (kg)
		0.5	0.7	1	2	3	5	A	B	
3/8" BSPT	31.9	22.6	26.7	31.9	45.1	55.3	71.3	43	108	0.23
1/2" BSPT	50.1	35.4	41.9	50.1	70.9	86.8	112.0	55	133	0.34
3/4" BSPT	68.4	48.4	57.2	68.4	96.7	118.5	152.9	67	159	0.68
1" BSPT	105	74.2	87.8	105.0	148.5	181.9	234.8	83	200	1.25
1 1/2" BSPT	146	103.2	122.2	146.0	206.5	252.9	326.5	97	233	2.95
2" BSP	282	199.4	235.9	282.0	398.8	488.4	630.6	121	286	5.67
3" BSP	684	483.7	572.3	684.0	967.3	1185	1529	146	492	18.1
4" BSP	1130	799.0	945.4	1130	1598	1957	2527	213	864	18.1
6" BSP	2720	1923	2276	2720	3847	4711	6082	321	1320	54.4
8" BSP	4550	3217	3807	4550	6435	7881	10174	416	1730	147

## Plastic Eductor Flow Rates and Dimensions

**Materials:** Glass-reinforced polypropylene or Kynar

Male Thread	K factor	Motive (pumped) flow in litres per minute @ BAR						Dimensions (mm)		Weight (kg)
		0.5	0.7	1	2	3	5	A	B	
1/4" BSPT	14.5	10.3	12.1	14.5	20.5	25.1	32.4	32	69.6	0.02
3/8" BSPT	24.5	24.5	29.0	34.7	49.0	60.1	77.5	54.0	114.0	0.03
1/2" BSPT	48.9	34.6	40.9	48.9	69.1	84.6	109.2	64.0	165.0	0.04
3/4" BSPT	64.5	45.6	54.0	64.5	91.2	111.8	144.3	73.0	162.0	0.06
1" BSPT	111.5	78.9	93.3	111.5	157.7	193.1	249.3	89.0	241.0	0.15
1 1/2" BSPT	160.4	113.4	134.2	160.4	226.8	277.8	358.6	114.0	248.0	0.21

**Discharge Lengths:** Approximate discharge plume length is 220 mm per 0.1 bar pressure drop. For example and eductor operating at 0.7 bar has an ejection plume of 1.54

$$\text{Flow Rate (l/min)} = K \sqrt{\text{bar}}$$

**Ask our technical sales engineers about additional products and services to optimise your spraying process.**

### Spray Calibration Solutions

Easy-to-use, fast measurement solutions to ensure accurate nozzle installation and maintenance, reduce water wastage and identify nozzle wear.



Spray Pattern & Droplet Distribution



Nozzle Flow Calibrators



Nozzle Cleaning Kit

### Complete Spray Bars

Tailored nozzle selections and spray bar designs that integrate seamlessly with your new or existing setup.


- ✓ Expert nozzle selection and placement
- ✓ Efficient spray coverage
- ✓ Fast turnaround time
- ✓ Reduced design burden
- ✓ High-quality spray bars



### Complete Custom Spraying Systems

Complete spraying systems built around your goals and application.

- ✓ Tailored upstream components supplied individually or as part of complete system
- ✓ Custom pipework, pumps, tanks, sensors, valves, heating, control panels and more
- ✓ Seamless integration with existing processes
- ✓ Built to budget and ROI targets
- ✓ End-to-end support: design, install, maintain

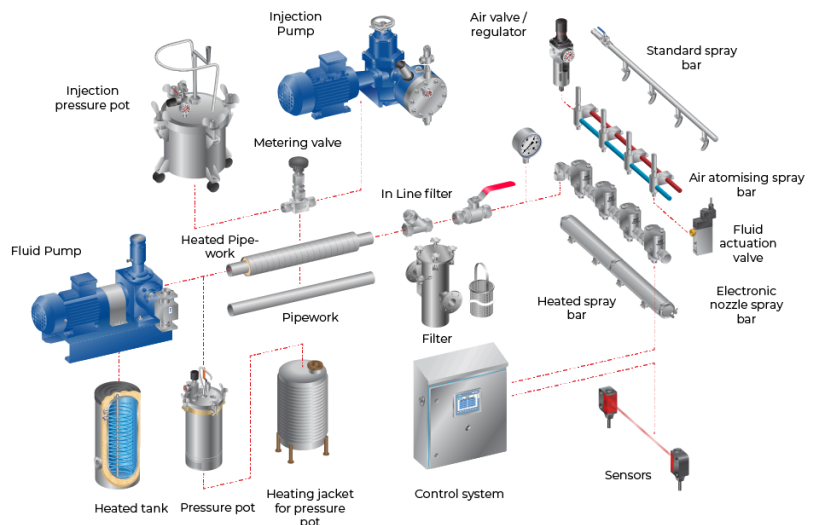

**THE GO-TO PEOPLE FOR SUCCESSFUL SPRAY ENGINEERING**